


Print Speed laser-jet

- Excellent whiteness, opacity, bulk and rigidity, and fully FSC certified.
- It is ideal for high-speed print runs and subsequent personalisation.

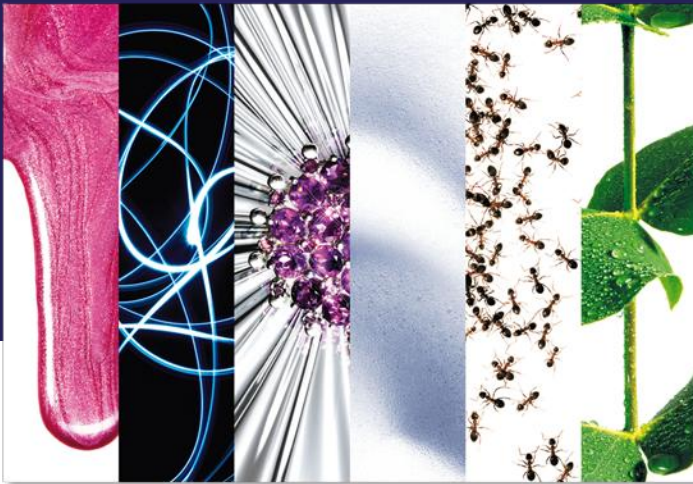

Basis weight	ISO 536	g/m ²	75	80	90	100	120	135	160	250
Brightness	ISO 2470	%	112	112	112	112	112	112	112	112
Whiteness	ISO 11457	%	169	169	169	169	169	169	169	169
Roughness	ISO 8791-2	ml/min	200	150	150	100	50	50	50	80
Opacity	ISO 2471	%	93,00	95,00	96,00	97,00	98,00	96,50	97,50	98,00
Moisture	ISO 287	%	5,2	5,2	5,2	5,2	5,2	6	6	6
Bulk		cm ³ /g	1,37	1,35	1,28	1,18	1,05	1,04	1,06	1,1
SPEC. Volume	ISO 534	µm	103	108	115	118	126	140	170	275

These values are to be considered only as indications and are subject to change according to trade tolerances in the quality specification
Issue Date: December 2010

